


BS BAR GATE (P-GATE)

Wise Neosco Co. Ltd. is a Korea-Based Organization established in 2001 and has multiple offices world-wide

Wise Neosco are identified as an OEM's (Original Equipment Manufacturer), and service provider of Speed Gate, P Gate, baggage scanner, Door Frame metal Detector (DFMD), Hand Handle Metal Detector(HHMD) & Access Control System and its Accessories

www.wiseneoscoindia.com

BS BAR GATE - (P GATE)

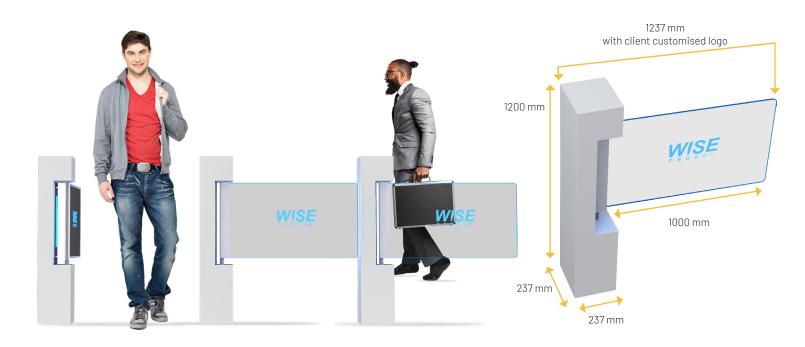



The implementation of a physical access control system is an essential aspect of facility security. By blocking the entry of outsiders, companies can prevent unauthorized entry and restrict access only to authorized persons, resulting in better user counting and access control. With the help of an access control system, companies can create a comfortable atmosphere within the workplace, knowing that only authorized personnel have access to the premises.

Access control systems also play a critical role in facility operations. By providing information about the access status of facility workers, companies can create a more efficient operation plan. Managers can determine which areas are being accessed the most, identify areas that require additional security, and even track the attendance of employees. In summary, access control systems are an essential component of modern facility security, providing a range of benefits that enhance safety, security, and productivity within the workplace.

Features

- Enhanced Security Support
- Slim & Good Design
- Disable Person Wheelchair pass assistance
- CI * UI Identify assistance
- Low noise & Fast opertation speed
- User friendly to everyone
- Minimal footprint
- Greater user safety, Fire alarm connection, safety sensors
- Seamless securtity barrier
- Length & width versatility (customized also availabe as per client required)





Parameter	Specifications
Model	BS BAR GATE - (P GATE)
Response Time of Sensors	< 0.1s
Speed of Opening/Closing	< 0.5s
Maximum Throughput	60 people/min
Lane Width (Customized)	1000mm*
Operating Temperature Range	-20°C to +60°C
Voltage	AC 100-240V, 50-60Hz
Material	Powder coated Stainless steel (304)
Wing Metarila	Polycarbonate
Noise Level	< 50dB
Durability	High 15+ Years*
Anti-tailgating	Supported
Anti-collision	Supported
Customization Options over Wing	Yes
Customization Options	Available
Authentication Methods	RFID, biometric, facial recognition, Bar Code, RS-232, QR Code, Remote etc
Compatibility with Third-Party Access Control Systems	Yes
Type of Drive	AC Servo Moter
Dimensions (L x W x H)	237mm x 237mm x 1200mm
Total Width	1237 mm including wing with Client customized Logo
LDM	LED
Direction Sign	Dot Matrix 16*32
Origin	Wise Neosco Korea





KOREA

Head Office 150, Jojeong-daero, Hanam-si, Gyeonggi-do, Korea

Telephone +82 317901390

Website www.neosco.co.kr

Research Laboratory

Hoegokri 43, Seorak-myeon, Gapyeong-gun, Gyeonggi-do, Korea

Fax +82 317901390



SCAN CODE TO VIEW PRODUCT

INDIA

Head Office Plot no. 24, Ecotech 6, Near Bhati Chowk, Kasna Greater Noida, U.P. INDIA (201310)

Email ID info@wiseneoscoindia.co **Telephone** +91 120 690 9565

Website www.wiseneoscoindia.com

Disclaimer: All pictures shown are for illustration purposes only. Actual product may vary due to product enhancement.